

008220" 4444 02800

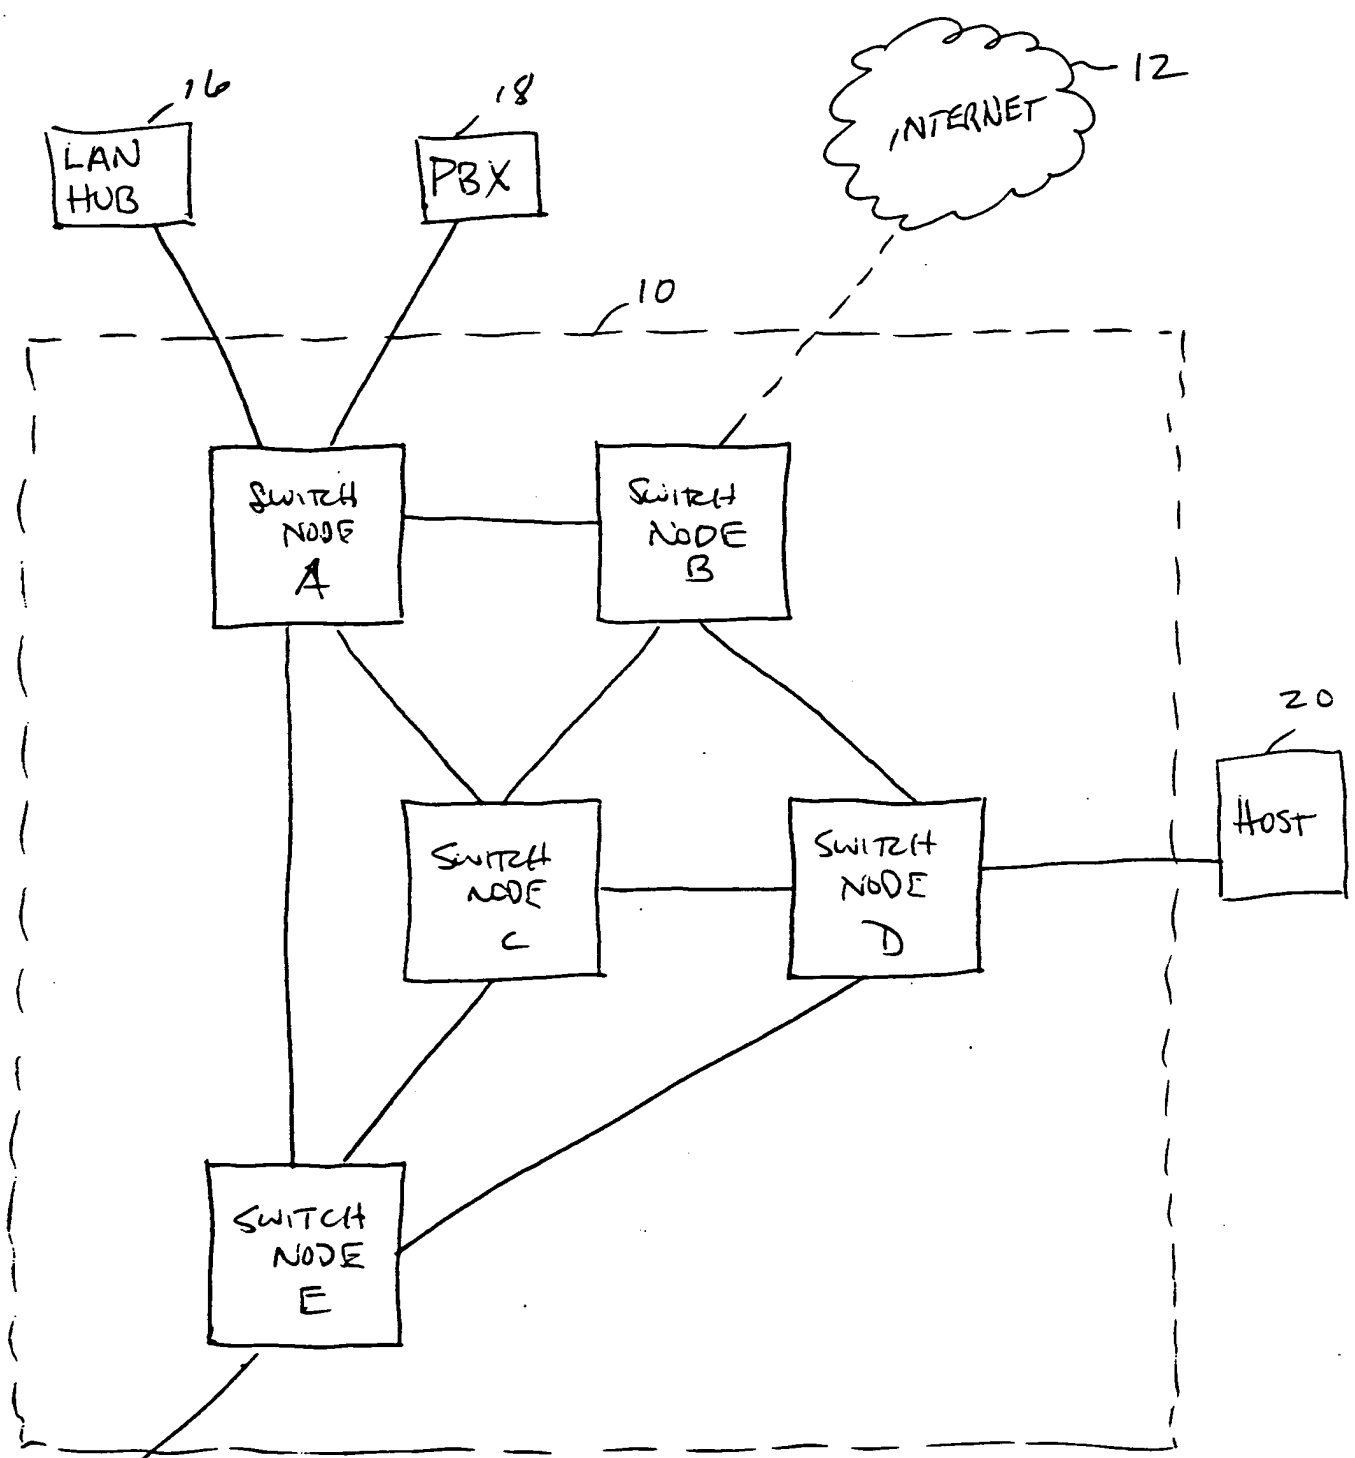


FIGURE 1

095144-02800

20	Device board and Traffic ATM address routing redundancy termination	Network layer routing and termination devices redundancy termination should be independent of the below layers if possible
22	Interconnection links redundancy termination	Detects faulty link and redirects Devices to other link
24	ATM Switch planes redundancy termination	Detects faulty plane and redirects Devices to other plane
26	Clock functions redundancy termination	Detects faulty TU or Clock reference and changes unit or reference source
28	Power distribution redundancy termination.	Redundancy terminated via diodes and if possible with supervision

FIGURE 2

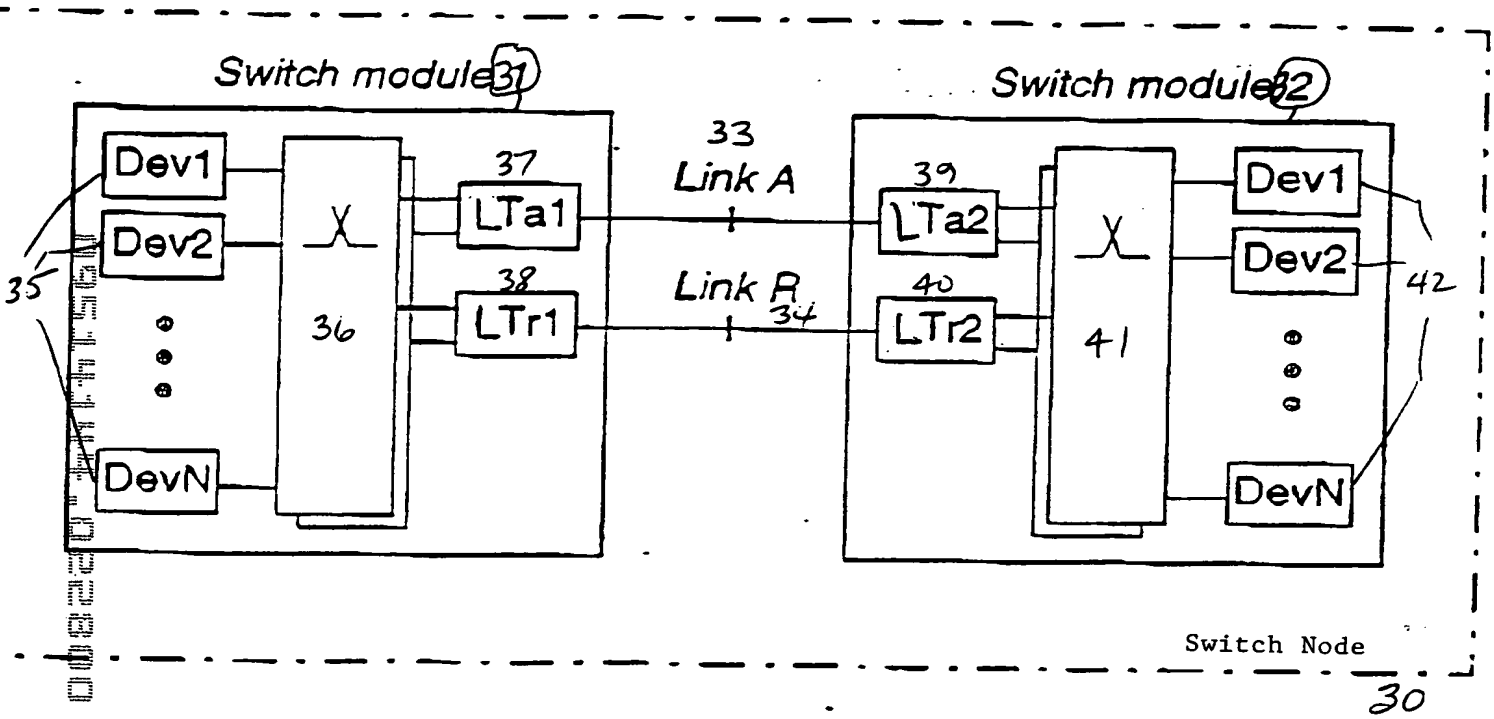


FIGURE 3

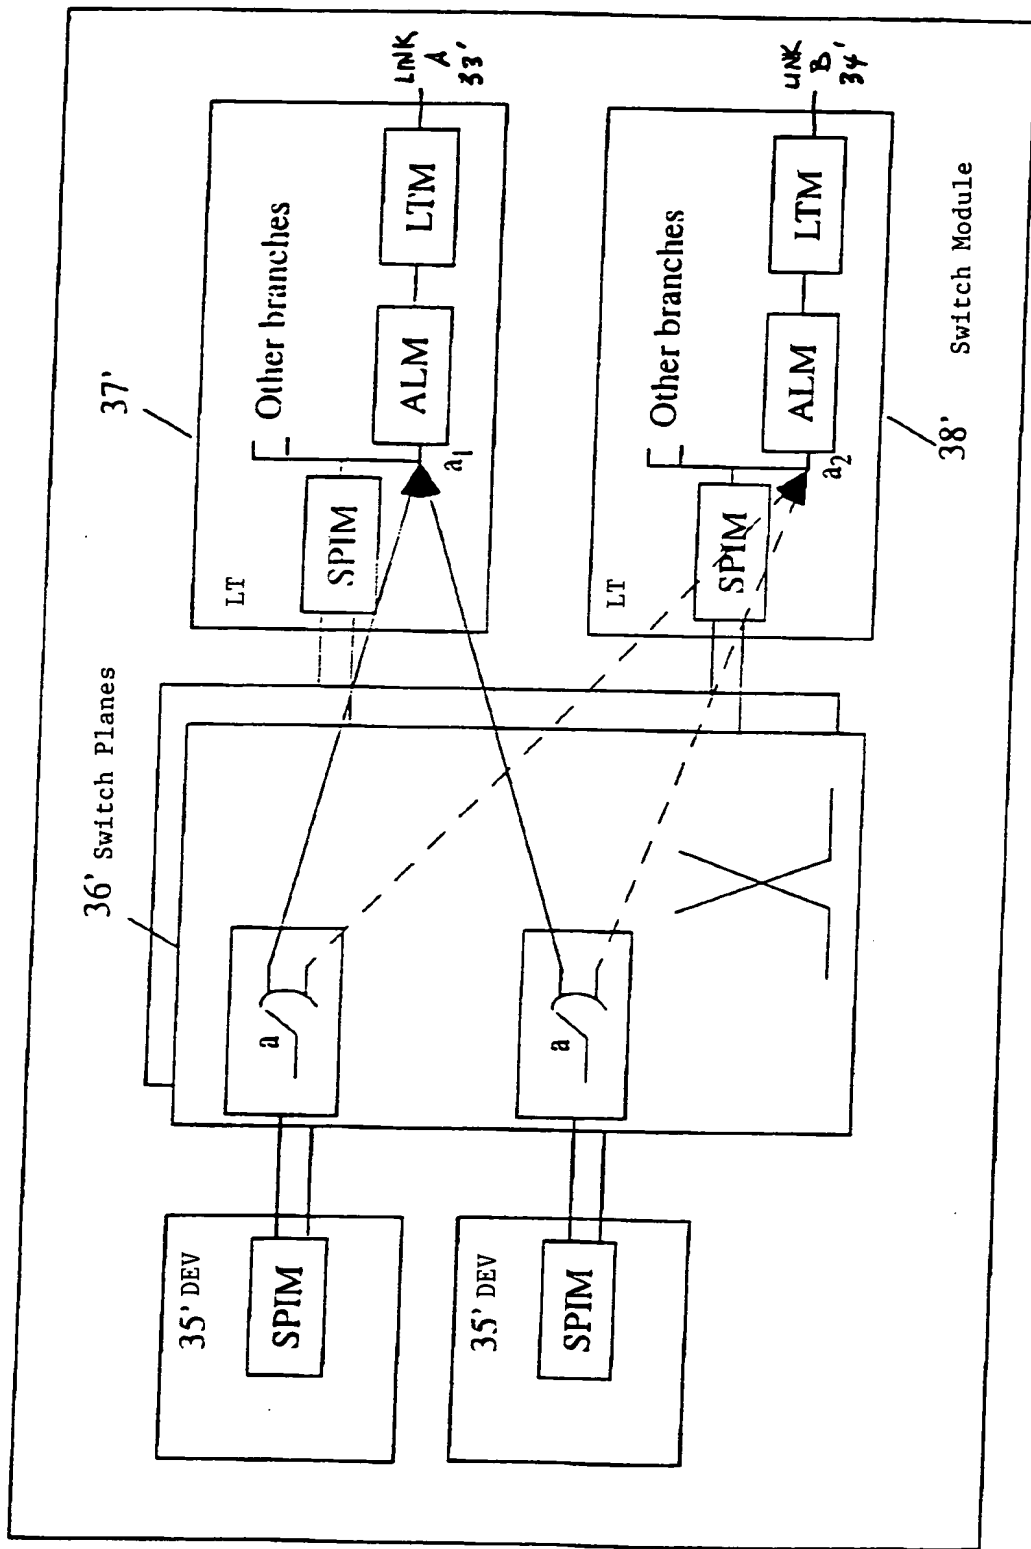


FIGURE 4A

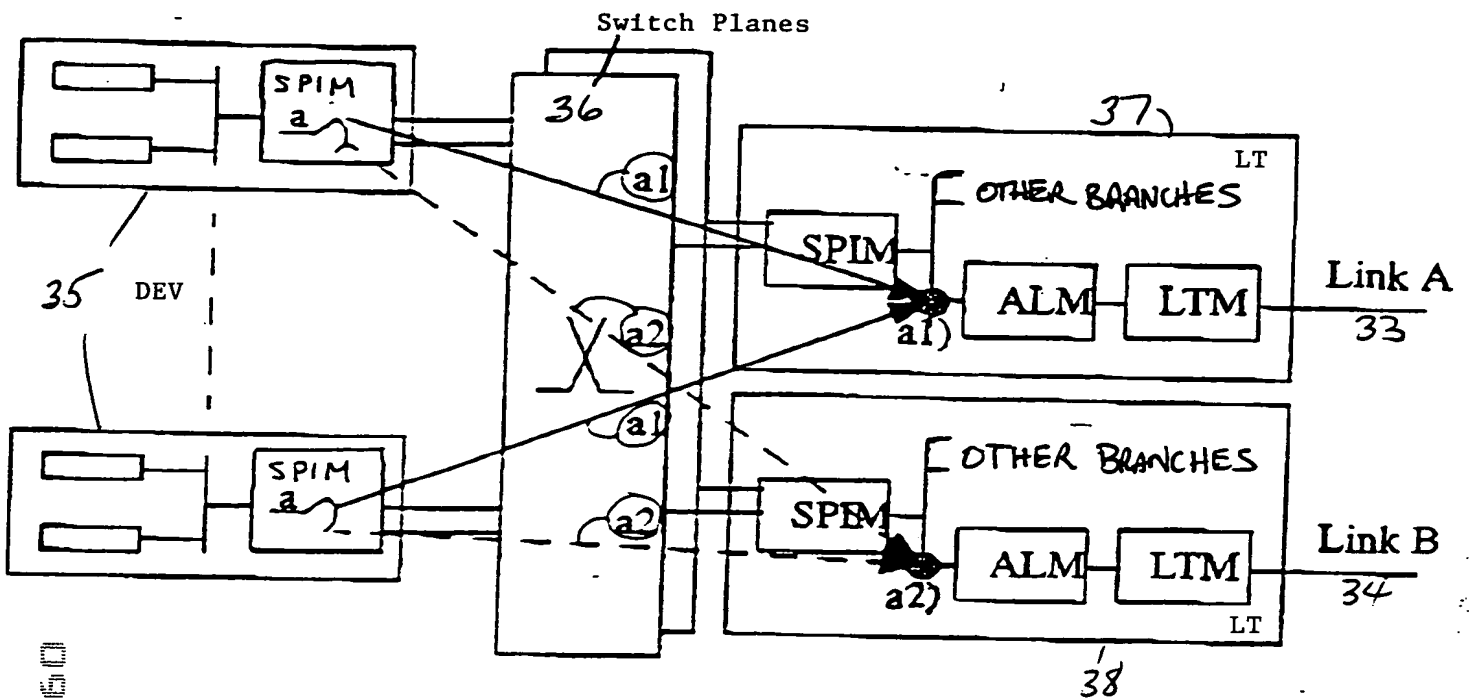


FIGURE 4

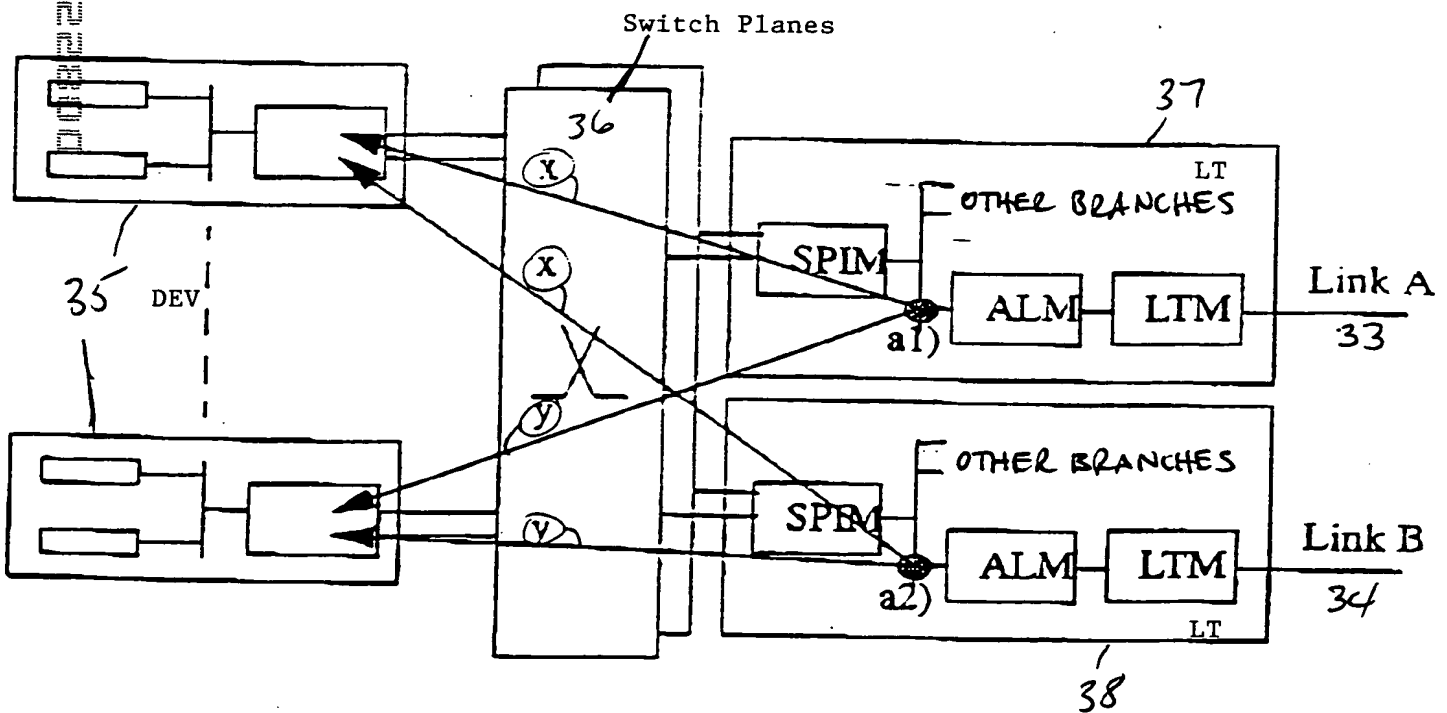


FIGURE 5

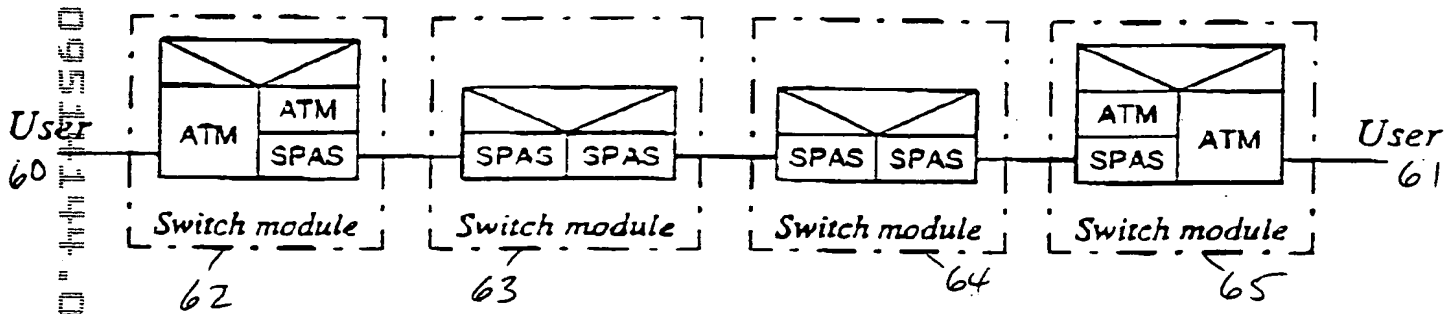


FIGURE 6